

Silenziatore

modello SFT



Livelli di rumore in dB 6 BAR
Noise level at 6 BAR


1/8	1/4	3/8	1/2	3/4	1
74	72	88	90	90	92

Livelli di rumore in dB 4 BAR
Noise level at 4 BAR

1/8	1/4	3/8	1/2	3/4	1
70	69	85	85	86	88







Filo in acciaio inox
Stainless steel wire
Fil acier inox
Inox stahldraht

Ottone
Brass
Laiton
Messing



A	F	H	E
1/8" BSP	6	13	13
1/4" BSP	7	14	16
3/8" BSP	8	18	19
1/2" BSP	10	19	24
3/4" BSP	10	22	30
1 BSP	12	23	38
M 5	5	12	13
1/8" FEM BSP	7	14	12

SILENZIATORI AIR SILENCERS SILENCIEUX SCHALLDÄMPFER

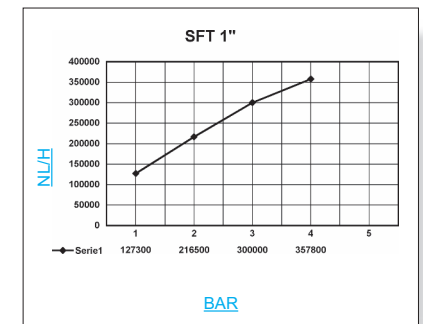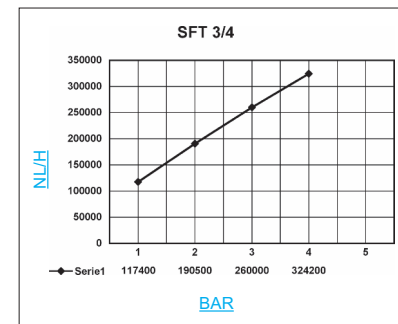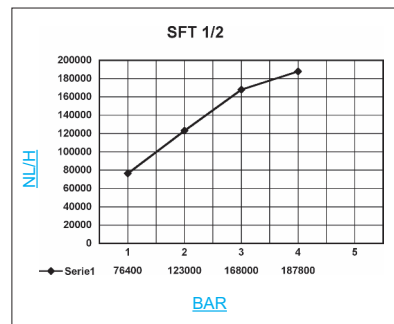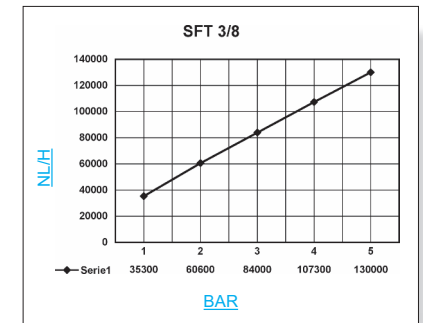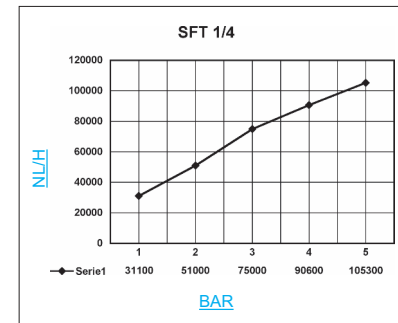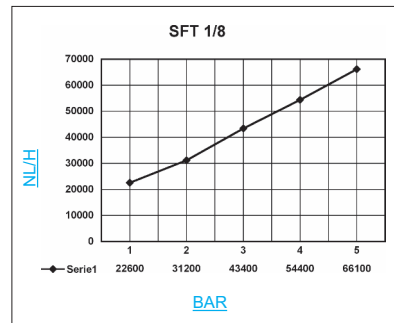

Condizioni normali di utilizzo dei silenziatori metallici sinterizzati: Pressione massima 12 BAR - Temperatura massima: + 80 °C - minima: -10°C - Flettature speciali sono disponibili a richiesta per quantità. - Le caratteristiche e le dimensioni riportate nel presente catalogo non si intendono impegnative.
Maximum pressure of use: 12 BAR - Maximum temperature: +80 °C - Lowest temperature: -10 °C - Characteristics and dimensions reported on this catalogue aren't engaging.