

Silenziatore

modello
RBP

Livelli di rumore in dB 6 BAR Noise level at 6 BAR

1/8	1/4	3/8	1/2		
72	73	84	88		

Livelli di rumore in dB 4 BAR Noise level at 4 BAR






1/8	1/4	3/8	1/2		
69	70	82	84		

A	MIN B	MAX	F	CH
1/8" BSP	14	19	6	12
1/4" BSP	17	22	8	15
3/8" BSP	18	24	9	22
1/2" BSP	18	24	10,5	22

A richiesta con filtro in filo inox
On request with a Stainless steel filter

Bronzo sinterizzato
Sintered bronze
Bronze frittè
Sinterbronze

Ottone
Brass
Laiton
Messing

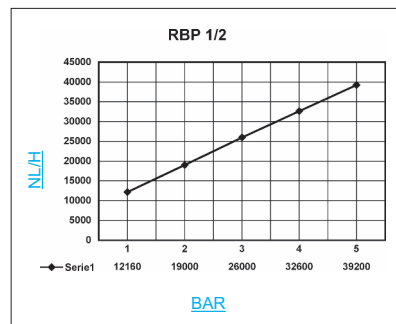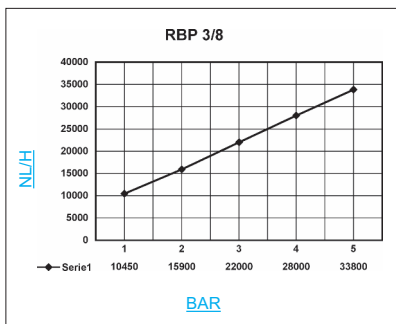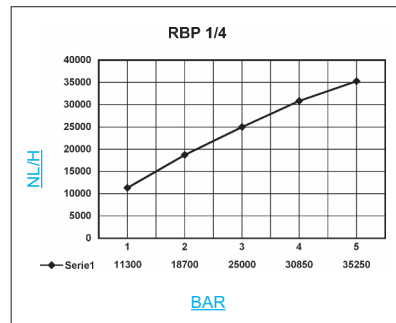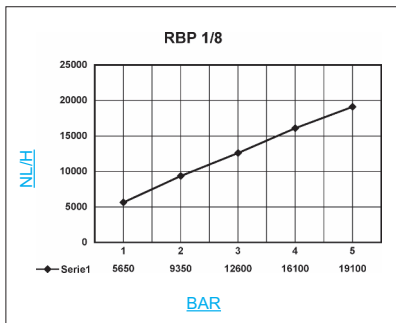

SILENZIATORI
AIR SILENCERS
SILENCIEUX
SCHALLDÄMPFER

COPOR



Condizioni normali di utilizzo dei silenziatori metallici sinterizzati: Pressione massima 12 BAR - Temperatura massima: + 80 °C - minima: -10°C - Filettature speciali sono disponibili a richiesta per quantità. - Le caratteristiche e le dimensioni riportate nel presente catalogo non si intendono impegnative.
Maximum pressure of use: 12 BAR - Maximum temperature: +80 °C - Lowest temperature: -10 °C - Characteristics and dimensions reported on this catalogue aren't engaging.