

Silenziatore

modello
SBT-T

Livelli di rumore in dB 6 BAR
Noise level at 6 BAR

1/8	1/4	3/8	1/2	3/4	1
75	81	82	85		








Livelli di rumore in dB 4 BAR
Noise level at 4 BAR

1/8	1/4	3/8	1/2	3/4	1
70	75	78	81	83	84

A	E	F	L	N	CH
1/8" BSP	13	6	15	4	6
1/4" BSP	16	7	20	3	7
3/8" BSP	19	8	27	3	10
1/2" BSP	24	10	28	4	13
3/4" BSP	30	10	38	4	17
1 BSP	38	12	46	7,5	22

Bronzo sinterizzato
Sintered bronze
Bronze frittè
Sinterbranze

Ottone
Brass
Laiton
Messing

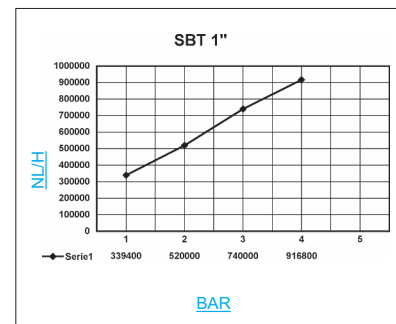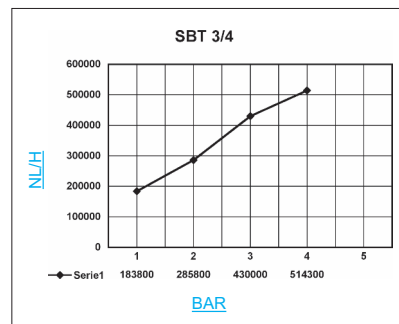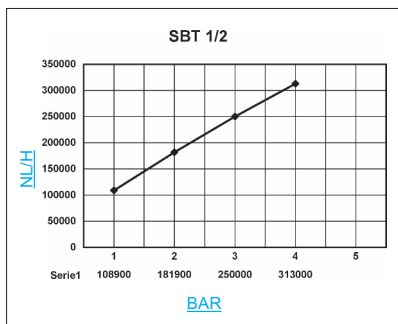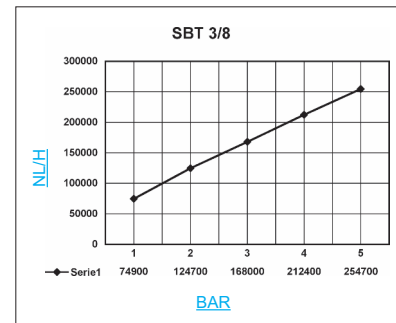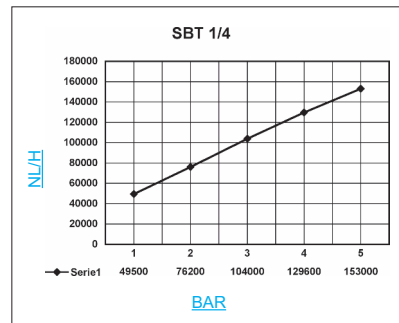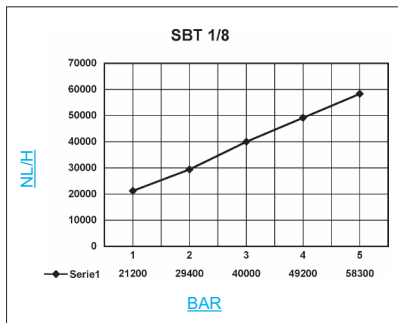

SILENZIATORI
AIR SILENCERS
SILENCIEUX
SCHALLDÄMPFER

COPOR



Condizioni normali di utilizzo dei silenziatori metallici sinterizzati: Pressione massima 12 BAR - Temperatura massima: +80 °C - minima: -10°C - Filettature speciali sono disponibili a richiesta per quantità. - Le caratteristiche e le dimensioni riportate nel presente catalogo non si intendono impegnative.
Maximum pressure of use: 12 BAR - Maximum temperature: +80 °C - Lowest temperature: -10 °C - Characteristics and dimensions reported on this catalogue aren't engaging.