

Silenziatore

modello
SEP

Livelli di rumore in dB 6 BAR Noise level at 6 BAR

1/8	1/4	3/8	1/2	3/4	1
73	74	85	89	89	90


Livelli di rumore in dB 4 BAR Noise level at 4 BAR

1/8	1/4	3/8	1/2	3/4	1
70	71	83	85	87	87







A	CH	F	H
1/8" BSP	13	6	13
1/4" BSP	16	7	16
3/8" BSP	19	8	16
1/2" BSP	24	9	18
3/4" BSP	30	9	18
1 BSP	36	10	19
M5	8	4	9
1/8" FEM BSP	13	5	12

Bronzo sinterizzato
Sintered bronze
Bronze frittè
Sinterbronze

Ottone
Brass
Laiton
Messing



modello **SEP**

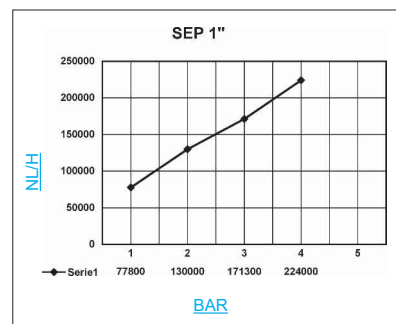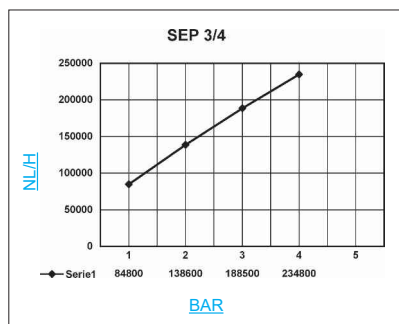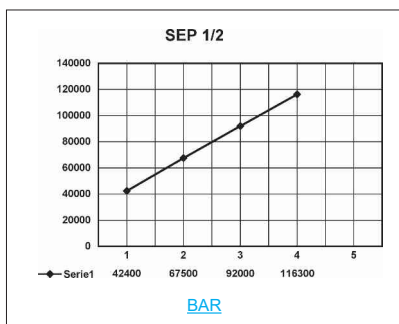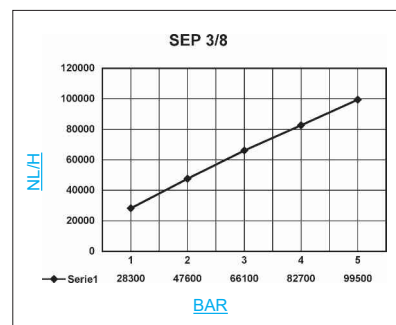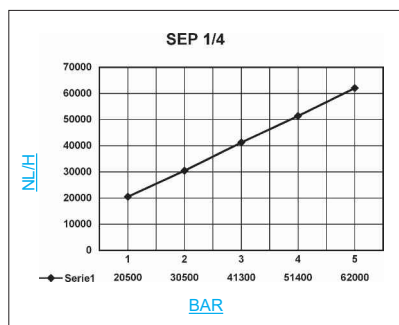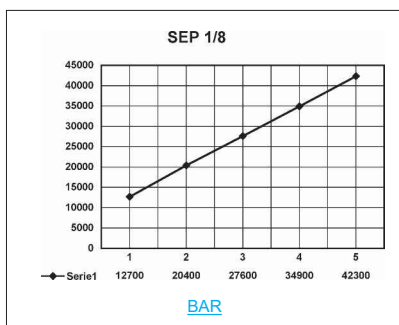

SILENZIATORI
AIR SILENCERS
SILENCIEUX
SCHALLDÄMPFER

COPOR



Condizioni normali di utilizzo dei silenziatori metallici sinterizzati: Pressione massima 12 BAR - Temperatura massima: +80 °C - minima: -10°C - Filettature speciali sono disponibili a richiesta per quantità. - Le caratteristiche e le dimensioni riportate nel presente catalogo non si intendono impegnative.
Maximum pressure of use: 12 BAR - Maximum temperature: +80 °C - Lowest temperature: -10 °C - Characteristics and dimensions reported on this catalogue aren't engaging.